




Fume Exhaust Blower

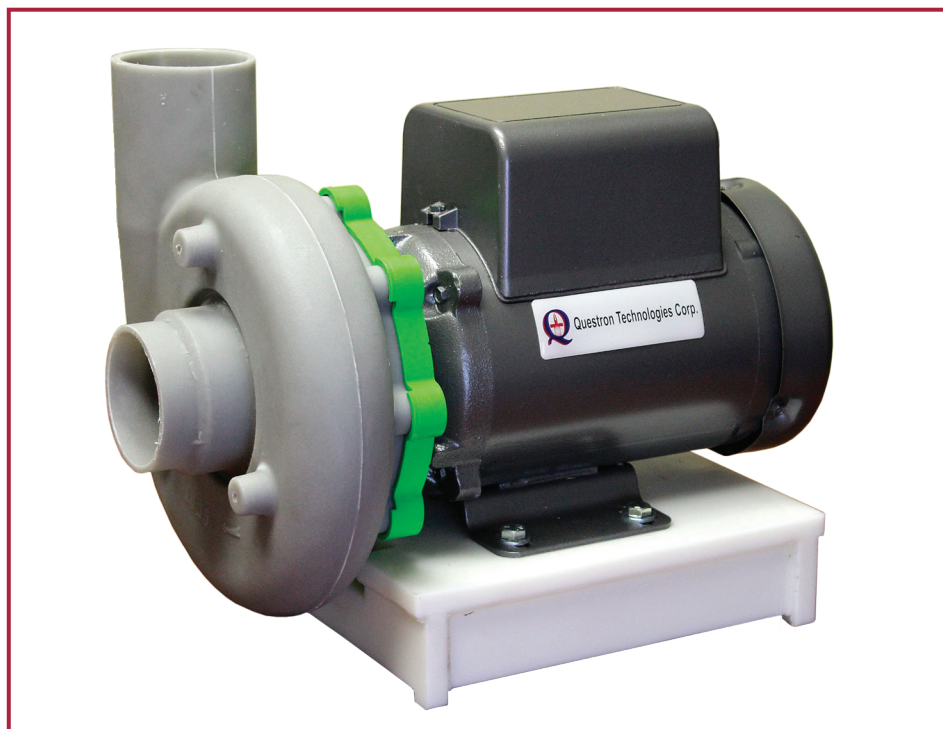

Features

- All plastic acid and alkali resistant construction. Designed to work in highly corrosive air applications, such as laboratory exhaust or the chemical industry.
- Polypropylene casing and wheel recommended up to 90 °C.
- Blower wheel is dynamically and electronically balanced up to 3450 rpm.
- CSA and UL listed motor rated for continuous duty at 115 VAC or 220 VAC, 50/60 Hz.
- Two Blower sizes available: Vulcan Blower and QAsh Blower
- Compact and efficient design for continuous operation.

Specifications

| | Vulcan Blower (84-100-047) | QAsh Blower (1800-125) |
|-------------------------------------|--|--|
| Dimensions (width x depth x height) | 41 x 48 x 58 cm (16 x 19 x 23 inches) | 25 x 38 x 30 cm (10 x 15 x 12 inches) |
| Exhaust Port Outer Diameter | 12.7 cm (5 inches) | 7.6 cm (3 inches) |
| Weight | 19 kg. (42 lbs.) | 14 kg. (30 lbs.) |
| Electrical Power | 220 VAC nom, 2 Amps, 50-60Hz 110 VAC nom, 3.5 Amps, 50-60Hz | 220 VAC nom, 1.2 Amps, 50-60Hz 110 VAC nom, 2.3 Amps, 50-60Hz |
| Air Flow | 200 CFM @ 1 lb SP | 120 CFM @ 0.5 lb SP |

Questron Technologies Corp.

6725 Millcreek Drive, Unit 7, Mississauga, Ontario L5N 5V3, Canada
Tel: 905-363-1223 Fax: 905-363-1227 E-Mail: sales@qtechcorp.com Website: www.qtechcorp.com